

# CABIN AIR FILTER – INSTALLATION INSTRUCTIONS


Part No.: **PC5245X**

Est. Installation Time: **less than 30 mins**

**GM OE: 10261703,103202760,10340216,10395221,10406026,10446783,15284939,3092099**

The Cabin air filter is located in front of the windshield under the cowl vent screen

- Open the hood and unhook the washer fluid tube from the cowl located on the passenger side of the car
- Pull the weather-stripping off the metal frame, starting at the passenger side and stopping at the half-way point
- Remove the cowl clip on the outside edge of the cowl closest to the passenger side tire
- Remove the cowl retainer cap (H005) by unscrewing it with a standard screwdriver
- Some models have a 9/16" bolt in the center of the cowl. Remove this bolt if it is present
- Push the passenger side section of cowl up and out of the way to gain access to the cabin filter
- Pull the old filter straight up to clear the filter frame, and then toward the front of the car to remove it. The old filter may be equipped with a loop of fabric
- Put the new filter in the housing with the fabric loop facing up. The new filter has partial cuts in its side-walls to allow it to bend during installation
- Reinstall in reverse order

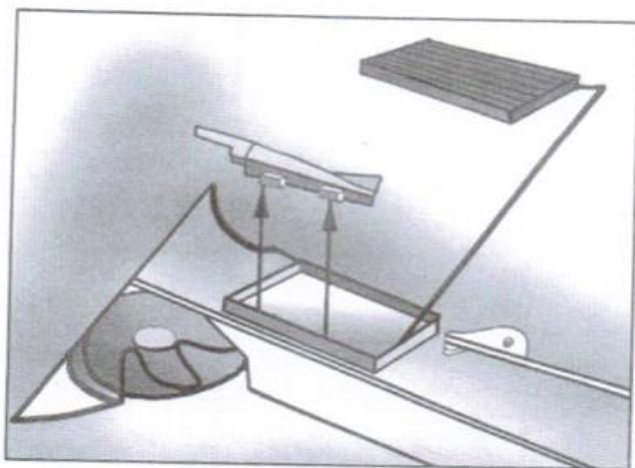

Hardware available for this application:



**Part # H004**  
push type cowl vent  
retainer



**Part # H005**  
cowl vent retainer

This is only a guide and may not be for exact model. See Owner's manual and/or local mechanic for exact instructions for the particular model.