

CABIN AIR FILTER – INSTALLATION INSTRUCTIONS

Part No.: **PC5667X**

Est. Installation Time: **less than 15 mins**

Toyota OE:87139-YZZ20,87139-50100,87139-02090; GM OE:19184673; Subaru OE :72880AJ00A

The Cabin air filter is located behind the glove compartment

- Open the glove box
- Remove the dampener rod by slightly closing the glove box while pulling the arm slightly forward (Fig 1)
- Push both sides of the glove box to disengage the stops and allow the glove box to hang freely on the hinges
- Remove filter housing cover by pressing it to the left and pulling it out – Fig 2 & 3 (some applications by pressing upon the two latches along the bottom edge and then pull the cover away)
- Remove the old cabin air filter, taking note the air flow arrow indicator on the side of the old filter (Fig 4)
- Insert the new filter into the assembly, making sure the air flow direction is correct according to the arrow indicator
- Replace the rest of the glove box assembly by reversing the removal procedure

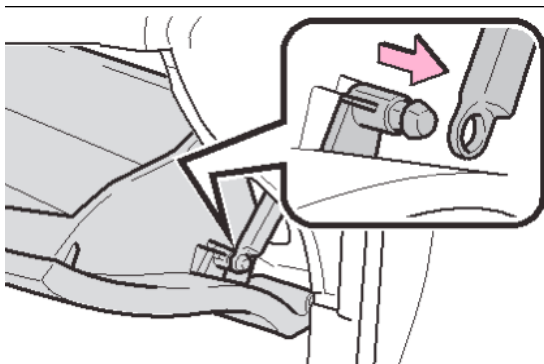


Figure 1



Figure 2

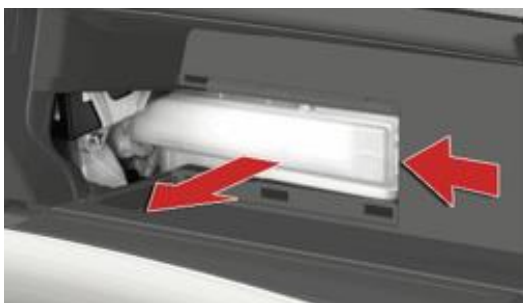


Figure 3



Figure 4

This is only a guide and may not be for exact model. See Owner's manual and/or local mechanic for exact instructions for the particular model.